


Flagpoles & Banner Poles

External and Internal Halyard with Small Door (IH/S) or Winch (IH/W) and with Tilting Base

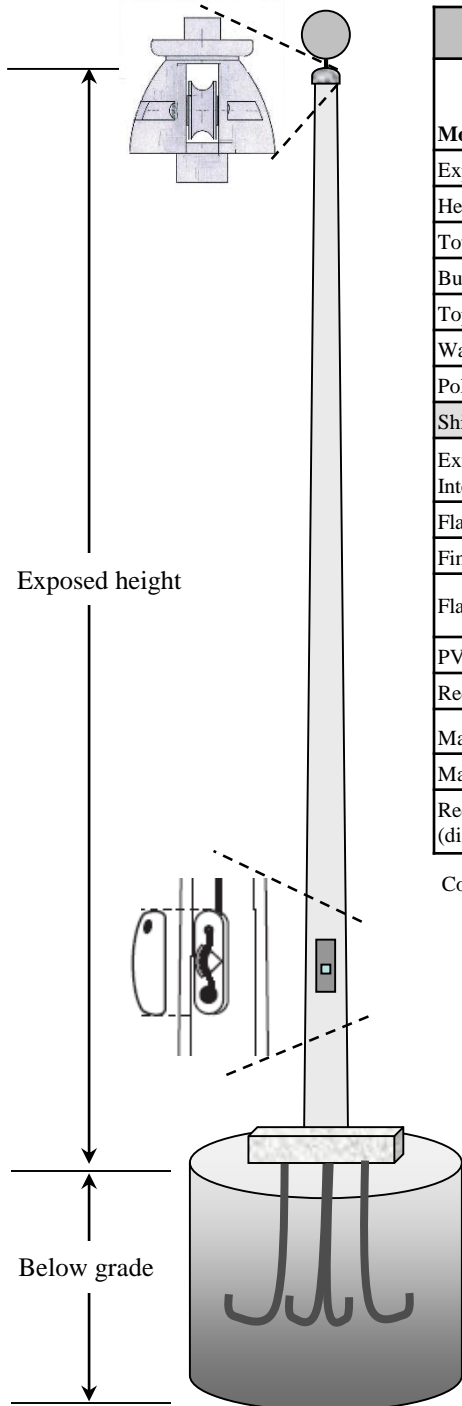

| Specifications for Flagpoles T-xx-TB, T-xx-IH-TB, and Banner Poles B-xx-TB | | | | | |
|--|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Model Number | B-20 T-20 T-20-IH | B-25 T-25 T-25-IH | B-30 T-30 T-30-IH | B-35 T-35 T-35-IH | B-40 T-40 T-40-IH |
| Exposed height | 20' | 25' | 30' | 35' | 40' |
| Height below grade | - | - | - | - | - |
| Total length | 20' | 25' | 30' | 35' | 40' |
| Butt diameter (ground level) | 4.4" | 4.7" | 5.0" | 5.4" | 5.8" |
| Top diameter | 2.75" | 2.75" | 2.75" | 2.75" | 2.75" |
| Wall thickness | 0.13" | 0.15" | 0.18" | 0.21" | 0.23" |
| Pole weight w/ tilting base | 43 lbs. | 50 lbs. | 58 lbs. | 73 lbs. | 103 lbs. |
| Shipping weight | 90 lbs. | 110 lbs. | 128 lbs. | 154 lbs. | 185 lbs. |
| External halyard diameter | 1/4" | 1/4" | 5/16" | 5/16" | 5/16" |
| Internal halyard diameter | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" |
| Flash collar (square) | 10" X 10" | 10" X 10" | 10" X 10" | 10" X 10" | 10" X 10" |
| Finial diameter | 4" | 4" | 5" | 5" | 6" |
| Flag clips | Stainless Steel | Stainless Steel | Stainless Steel | Stainless Steel | Stainless Steel |
| PVC Cleat | 6.3" | 6.3" | 6.3" | 6.3" | 6.3" |
| Recommended flag size | 3' X 5' | 4' X 6' | 5' X 8' | 6' X 10' | 6' X 10' |
| Maximum wind un-flagged | 210 mph | 190 mph | 170 mph | 160 mph | 140 mph |
| Maximum wind with flag | 170 mph | 150 mph | 130 mph | 120 mph | 110 mph |
| Recommended foundation (diameter X height) | 30" X 30" | 30" X 36" | 30" X 42" | 35" X 48" | 35" X 54" |

Counterweights on internal halyard poles: 2.5 lbs.

